


TEST CONDITIONS:
 INPUT SIGNAL - .15VRMS @ 1KHz
 TONE CONTROLS AT 12:00
 MASTER GAIN FULL
 ADJUST PRE GAIN FOR 14VRMS AT OUTPUT

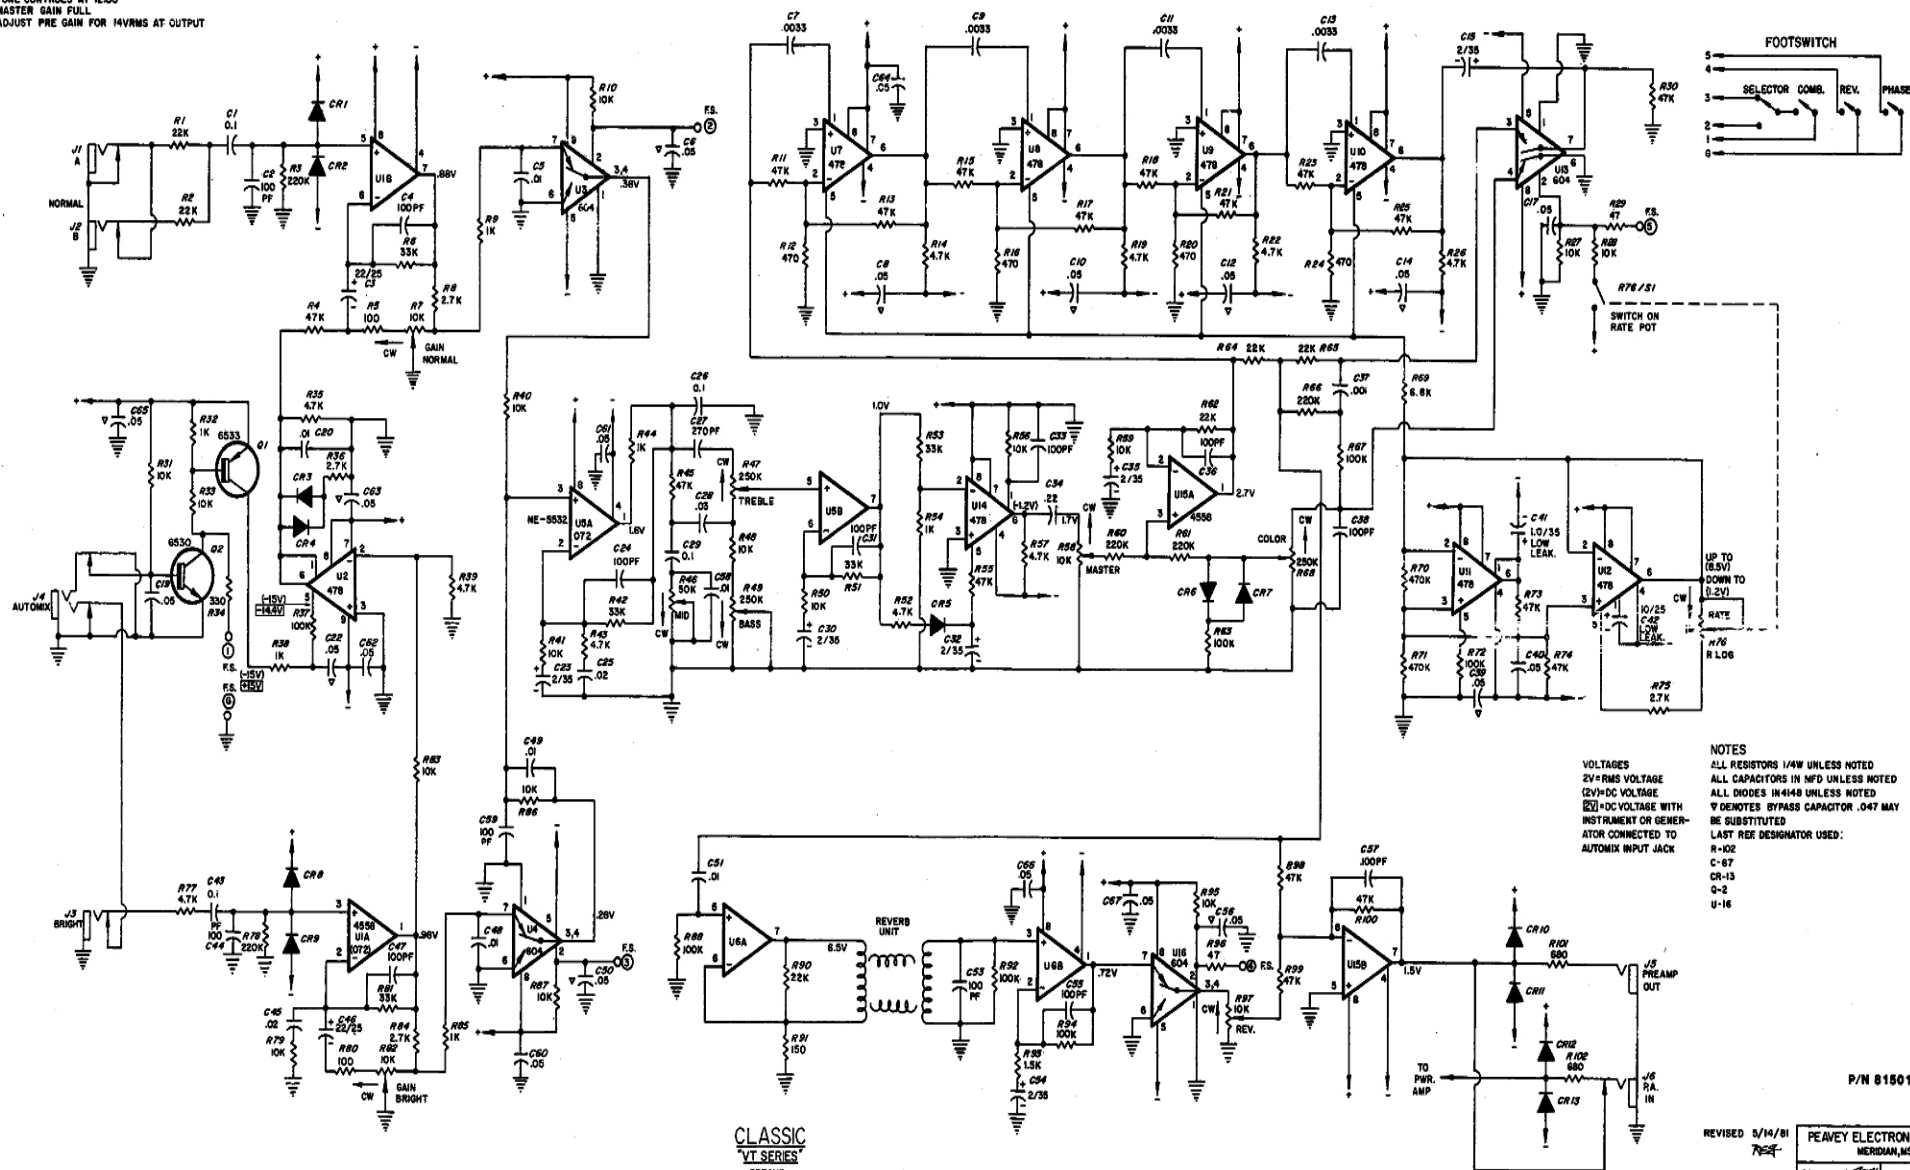

CLASSIC
 VT SERIES
 PREAMP
 BD. #9900815


VOLTAGES
 2V=RMS VOLTAGE
 12V=DC VOLTAGE
 10V=DC VOLTAGE WITH
 INSTRUMENT OR GENER-
 ATOR CONNECTED TO
 AUTOMIX INPUT JACK

NOTES
 ALL RESISTORS 1/4W UNLESS NOTED
 ALL CAPACITORS IN MFD UNLESS NOTED
 ALL DIODES IN 4148 UNLESS NOTED
 V DENOTES BYPASS CAPACITOR .047 MAY
 BE SUBSTITUTED FOR GENER-
 ATOR CONNECTED TO
 AUTOMIX INPUT JACK
 R-102
 C-67
 CR-13
 Q-2
 U-16

P/N 81501087

REVISED 5/14/81
 PEAVEY ELECTRONICS CORP.
 MERIDEN, CT
 DRAWN BY: J. A. K. DATE: 3-15-78
 CK BY: J. A. K.
 APPR BY: L. A. K. 4-18-78






REVISED 4/8/81
R37

COPYRIGHT 1981 PRINTED IN U.S.A.

DEUCE/MACE/CLASSIC/ARTIST POWER SUPPLY BOARD

JUMPER USED ONLY IN "CLASSIC" MODEL

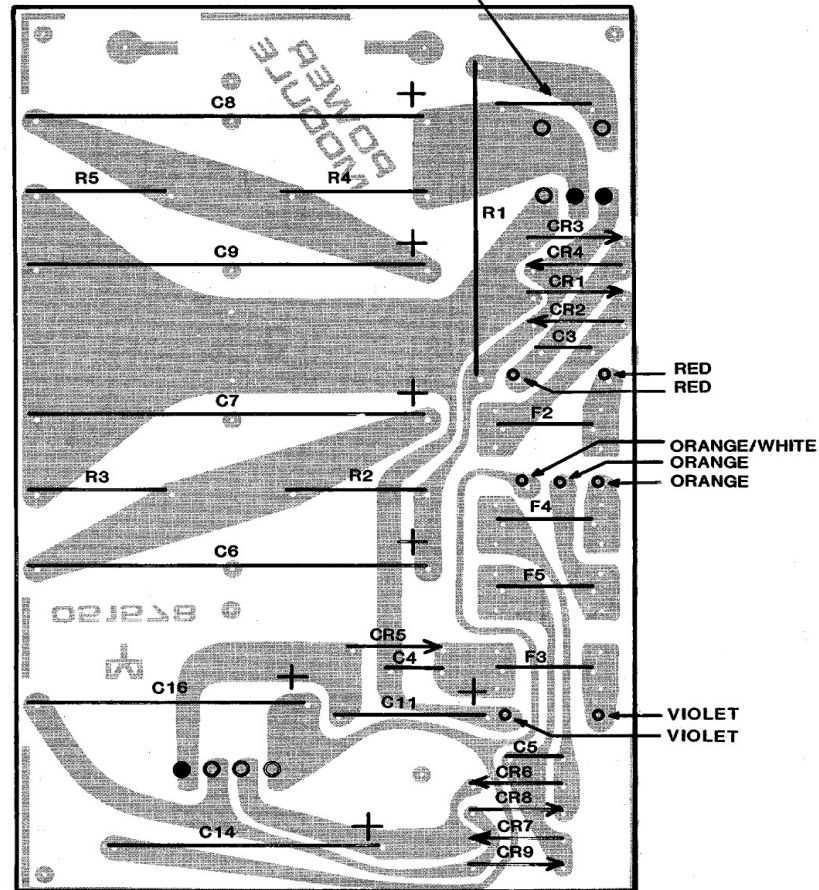

- MALE MOLEX PIN
- FEMALE MOLEX PIN